



*Stainless available!*

**MADE TO  
ORDER**



*Choose a Lanyard made to your exact specifications! Other cable constructions, lanyard styles and terminations are available. Call for details.*


## Steel Lanyards

Pivot Point offers a selection of high quality lanyard assemblies 3/64 to 1/8 cable diameter for light duty retention. These lanyards are typically attached to pins and other fasteners to prevent loss.

All Pivot Point standard lanyards are made from 7x7 aircraft cable chosen for its strength and flexibility. Stock sizes are available in galvanized steel cable, bare or coated with polyvinyl chloride (PVC) or nylon. PVC coating is more popular because of its appearance, flexibility, and low cost. Nylon offers more durability and abrasion resistance.

Cable Diameter	Minimum Breaking Strength (lbs.)	Standard Loop Size (inches)	Standard Eyelet Diameter (inches)
3/64	270	3/4	.190
1/16	480	7/8	.190
3/32	920	1 or 1-1/4 (min.)	.250
1/8	1600	1-1/2 (min.)	.316

*Unless otherwise noted, all dimensions are for reference only.*

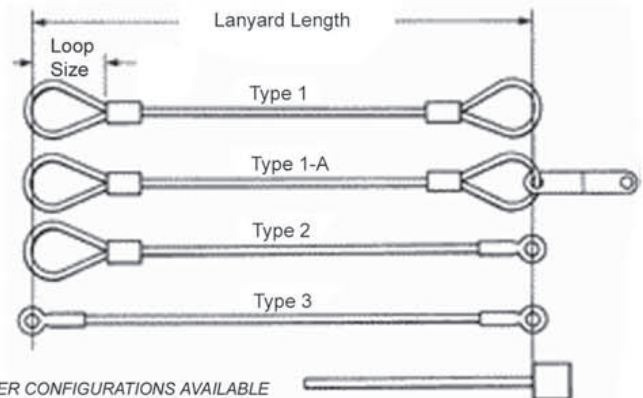

OTHER CONFIGURATIONS AVAILABLE

*Optional stop sleeve available. Price on application.*

### Steel Lanyards

Part No.	Stock Sizes Cable (Diameter x Length)	Coating	Type	Approximate Weight/Pounds per 100 pieces
L47B-600-1	3/64 x 6	Bare cable		.42
L47P-600-1	3/64 x 6	PVC to 1/16	Type 1	.50
L47N-600-1	3/64 x 6	Nylon to 1/16		.51
L47B-600-2	3/64 x 6	Bare cable		.59
L47P-600-2	3/64 x 6	PVC to 1/16	Type 2	.65
L47N-600-2	3/64 x 6	Nylon to 1/16		.66
L47B-600-3	3/64 x 6	Bare cable		.75
L47P-600-3	3/64 x 6	PVC to 1/16	Type 3	.80
L47N-600-3	3/64 x 6	Nylon to 1/16		.81
L62B-600-1	1/16 x 6	Bare cable		.75
L62P-600-1	1/16 x 6	PVC to 3/32	Type 1	.95
L62N-600-1	1/16 x 6	Nylon to 3/32		1.10
L62B-600-2	1/16 x 6	Bare cable		1.20
L62P-600-2	1/16 x 6	PVC to 3/32	Type 2	1.26
L62N-600-2	1/16 x 6	Nylon to 3/32		1.38
L62B-600-3	1/16 x 6	Bare cable		1.48
L62P-600-3	1/16 x 6	PVC to 3/32	Type 3	1.59
L62N-600-3	1/16 x 6	Nylon to 3/32		1.67